



GAST MANUFACTURING, INC.
 A Unit of IDEX Corporation
 Post Office Box 97
 Benton Harbor, Michigan
 Ph: 269/926-6171
 Fax: 269/925-8288

PART NUMBER:

LTD140

REV.

E





Product Specifications

MODEL NUMBER	MOTOR SPECIFICATIONS	RPM	MAX VAC		MAX PRESS		HP	kW	NET WT.	
			"H ₂ O	mbar	"H ₂ O	mbar			lbs.	kg
R3105-1 R3105-69	110/220-240-50-1	2850	28	70	31	77	1/3	0,25	29	13,2
* R3105K-1	115/208-230-60-1	3450	40	100	43	107	1/2	0,37	30	13,6

SOUND LEVEL 68/63 dB(A) MAX. @ 60/50 Hz
 NORMAL AMBIENT -29°C TO 40°C
 RELATIVE HUMIDITY 0% - 100% NON CONDENSING
 ENVIRONMENT CLEAN DUST FREE

NOTES:
 1. TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
 2. * DENOTES INACTIVE MODEL.

Product Performance (Metric U.S. Imperial)

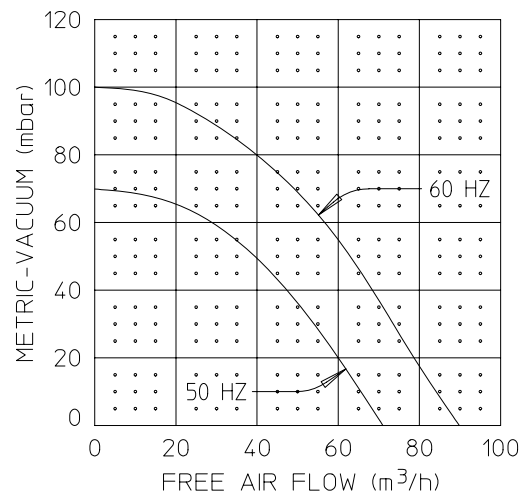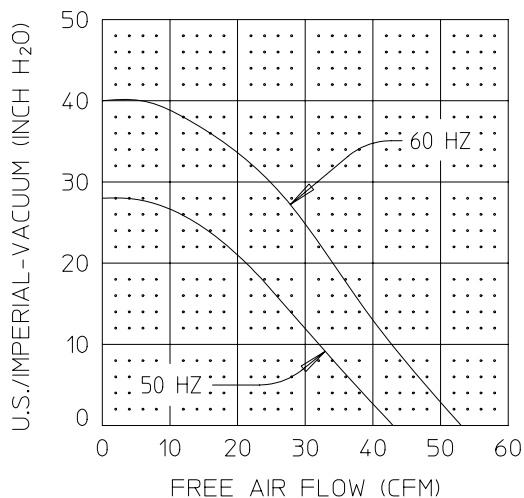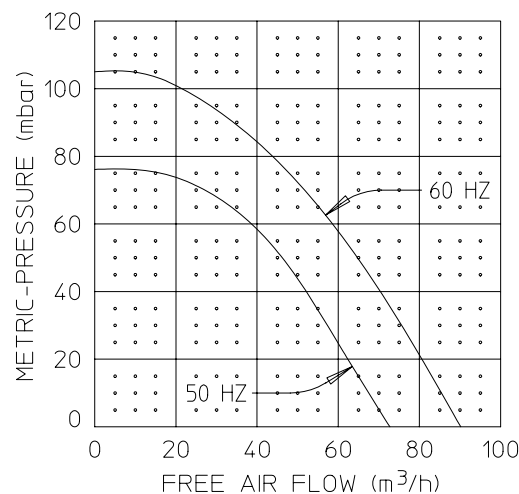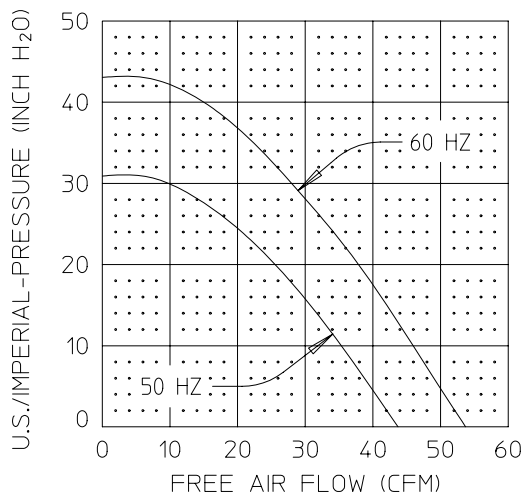

PERFORMANCE DATA
 THE PERFORMANCE DATA SHOWN WAS DETERMINED UNDER THE FOLLOWING CONDITIONS:
 LINE VOLTAGE @ 60 Hz. 230V OR 460V FOR 3 PHASE UNITS. 115V OR 230V FOR 1 PHASE UNITS.
 LINE VOLTAGE @ 50 Hz. 220V FOR 3 PHASE OR 1 PHASE UNITS.
 UNITS IN A TEMPERATURE STABLE CONDITION.
 DELIVERY MEASUREMENTS MADE WITH OUTPUT PORT THROTTLED.
 SUCTION MEASUREMENTS MADE WITH INPUT PORT THROTTLED.
 TEST CONDITIONS: INLET AIR DENSITY @ 0.075 lbs. per cu. ft. [20°C (68°F), 29.92" Hg (14.7 PSIA)].
 NORMAL PERFORMANCE VARIATIONS ON THE RESISTANCE CURVE WITHIN ±10% OF SUPPLIED DATA CAN BE EXPECTED.

Product Dimensions

Metric (mm) / U.S. Imperial (inches)

Low Voltage, Single Phase

- Blue P1 Line
- Brown P2
- Black 5 Tie Together Insulate
- Orange 3
- White 2 Tie Together
- Yellow 4 Line

High Voltage, Single Phase

- Blue P1 Line
- Brown P2 Insulate
- Black 5 Tie Together Insulate
- Orange 3
- White 2 Tie Together
- Yellow 4 Line

Wiring Diagram

